

## SPICE Modeling Report

No. SPM-RP130x121x\_C,YC-210902

### Terms of Use for SPICE Model

#### 1. Introduction

- This SPICE MODEL is a simulation model and not for use in actual product operation.( “Purpose” )  
It is not an alternative to the actual product.  
Please use this SPICE MODEL to assist in the actual product operation check.
- Reference information on simulation execution and operating condition for each model may be listed in each net list file, therefore please check before using the SPICE MODEL.

#### 2. Terms of Use

- This SPICE MODEL is a model for the typical characteristics under the ambient temperature condition of 25°C.

#### 3. No licensed

- NISD does not grant any rights, including but not limited to patent or mask works with regards to circuits described in relevant documents.
- The SPICE MODEL shall be duplicated for the Purpose only.

#### 4. Disclaimer

- NISD shall not be responsible for any changes and inaccuracies caused by the SPICE MODEL.
- Although NISD strives to ensure that SPICE MODEL works properly, NISD shall not guarantee that the SPICE MODEL operates under all conditions, Computers and simulators.

※ NISD is an abbreviation for Nisshinbo Micro Devices Inc.

### SPICE Model

- Library file name..... RP130x121x\_C.txt, RP130x121x\_YC.lib
- Terminal information


Device Pin No.				Device Symbol	Description	Model Symbol
DFN(PL) 1010-4	DFN 1212-4	SC-82AB	SOT-23-5			
1	1	3	5	V <sub>OUT</sub>	Output Pin	VOUT
2	2	2	2	GND	Ground Pin	GND
3	3	1	3	CE	Chip Enable Pin ("H" Active)	CE
4	4	4	1	V <sub>DD</sub>	Input Pin	VDD
–	–	–	4	NC	No Connection	–

## RP130x121x\_C,YC

No. SPM-RP130x121x\_C,YC-210902

### Characteristic Data


#### Output Voltage vs. Output Current

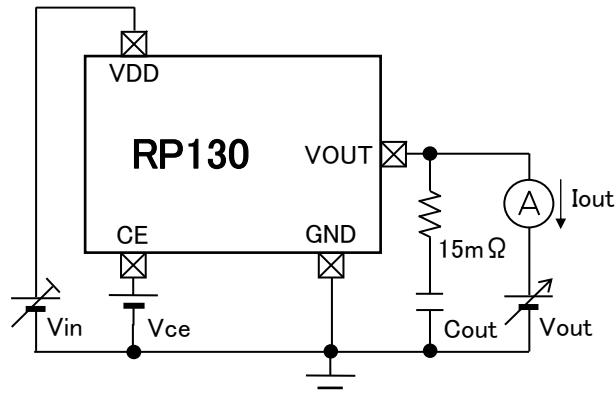

#### Condition


Vin = 2.2, 3.6, 4.2, 6.0, 6.5 [V]  
Vce = 1.0 [V]  
Cout = 0.47 [ $\mu$ F]  
Vout = 0 to 1.4 [V] DC Sweep

#### • Simulation Result

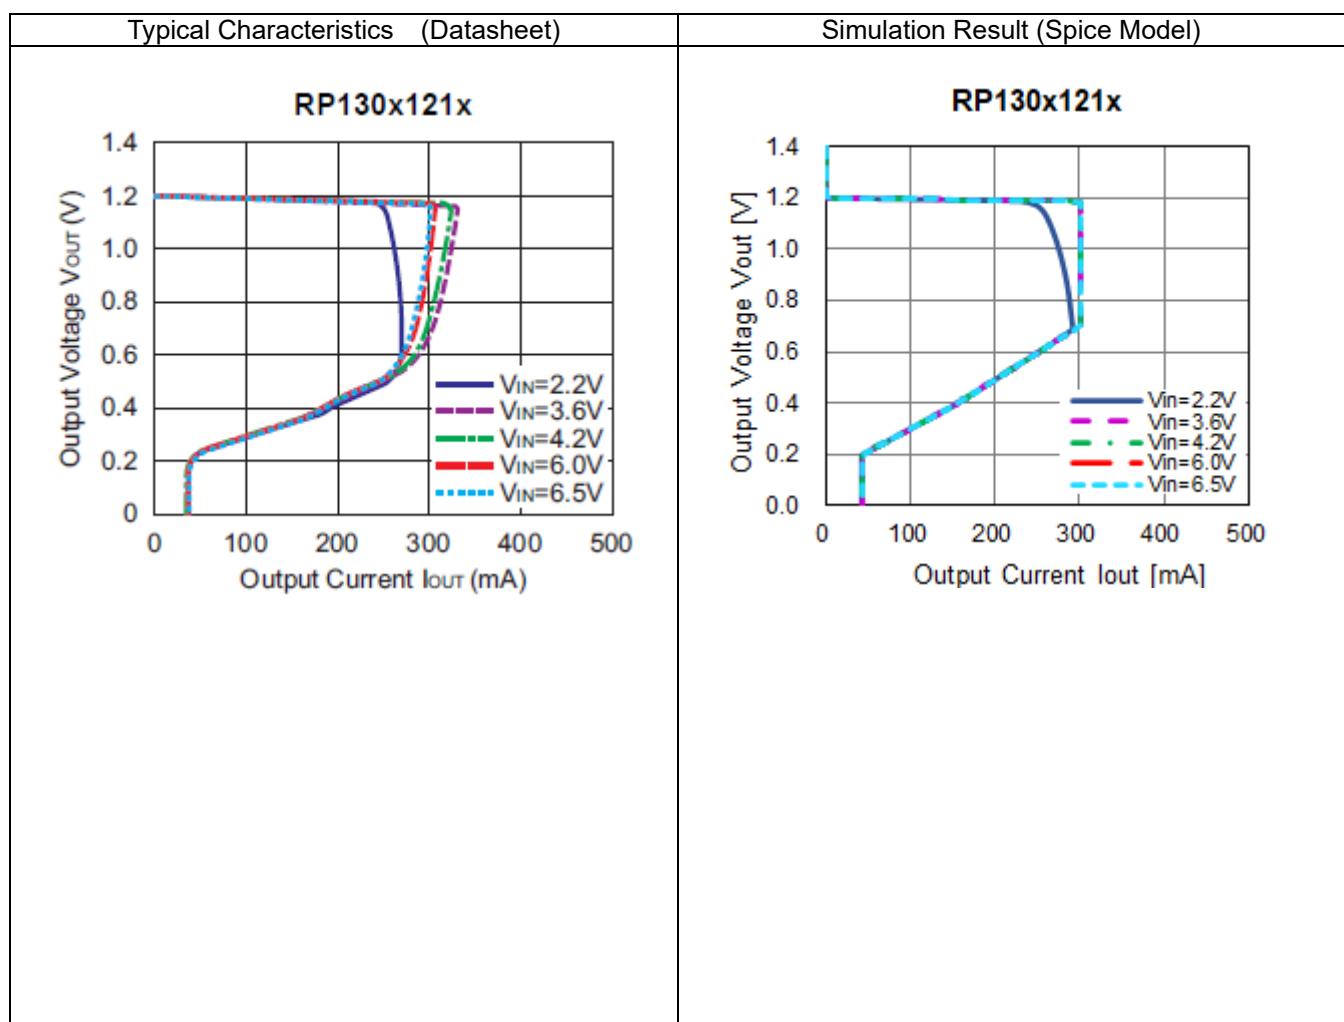

## Characteristic Data

## Output Voltage vs. Input Voltage

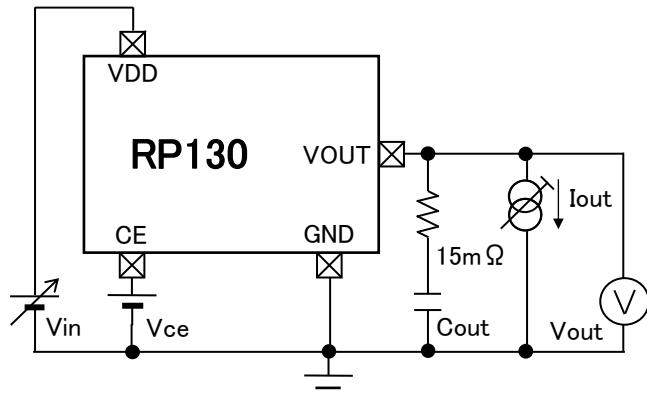Condition

Vin = 0 to 6.5 [V] DC Sweep


Vce = 1.0 [V]

Cout = 0.47 [ $\mu$ F]

Iout = 1, 30, 50 [mA]

Execute transient simulation with a very slow Vin sweep for stable results.

## • Simulation Result

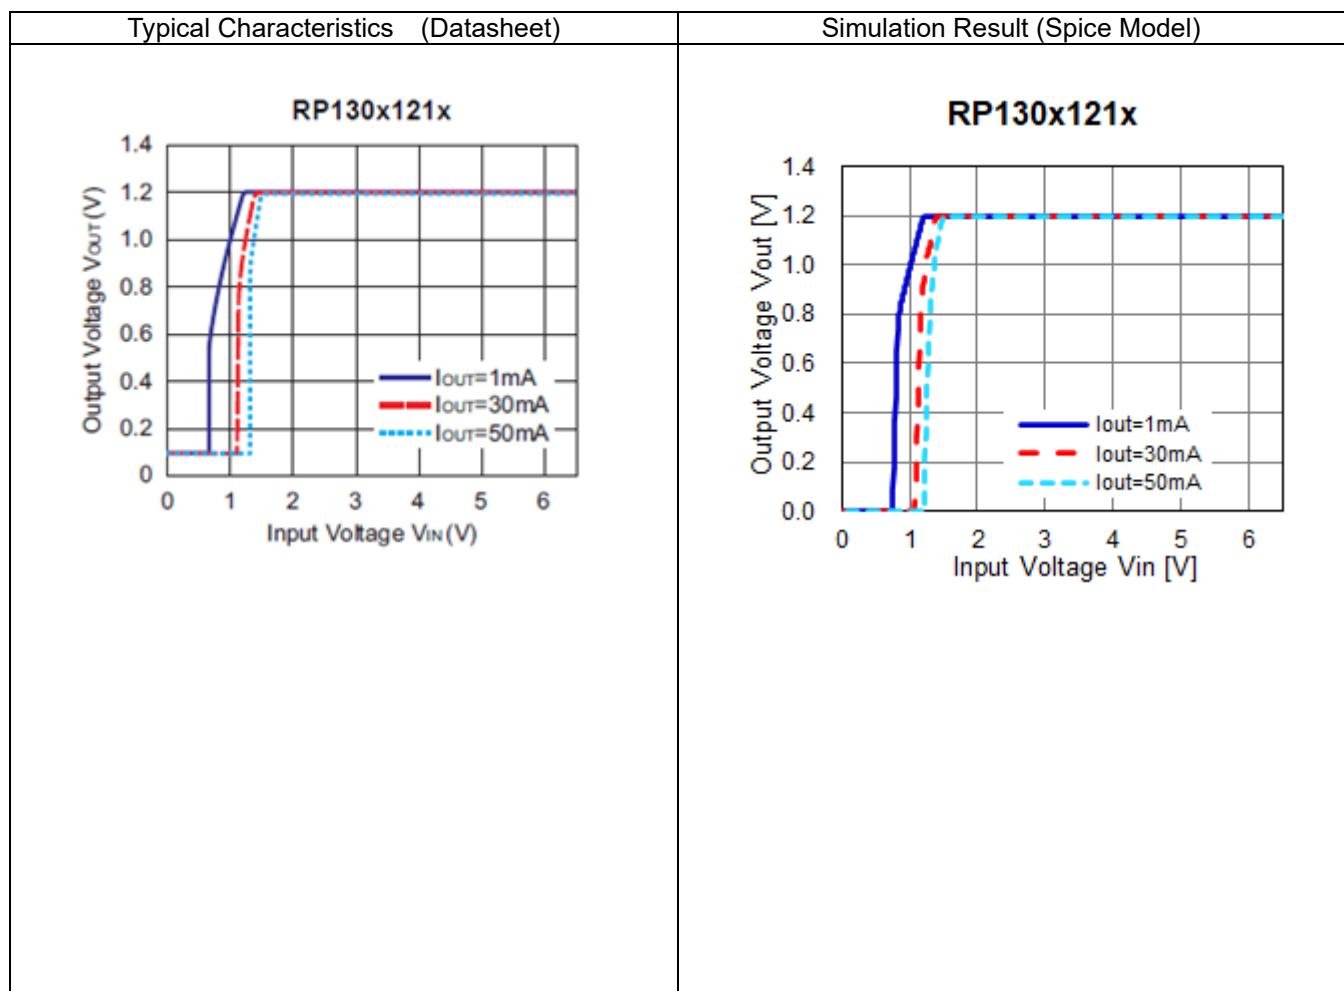

---


## RP130x121x\_C,YC

---

No. SPM-RP130x121x\_C,YC-210902

### Characteristic Data


#### Supply Current vs. Input Voltage

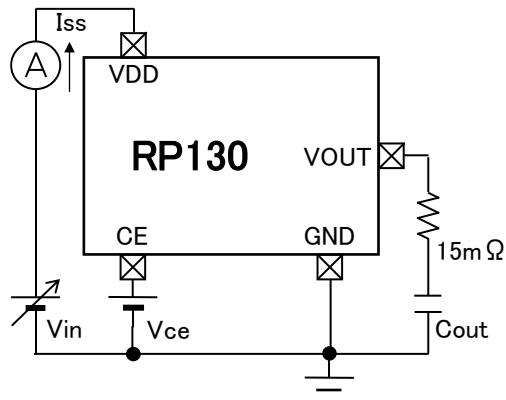

#### Condition


Vin = 0.0 to 6.5 [V] DC Sweep  
Vce = 1.0 [V]  
Cout = 0.47 [ $\mu$ F]

- Simulation Result

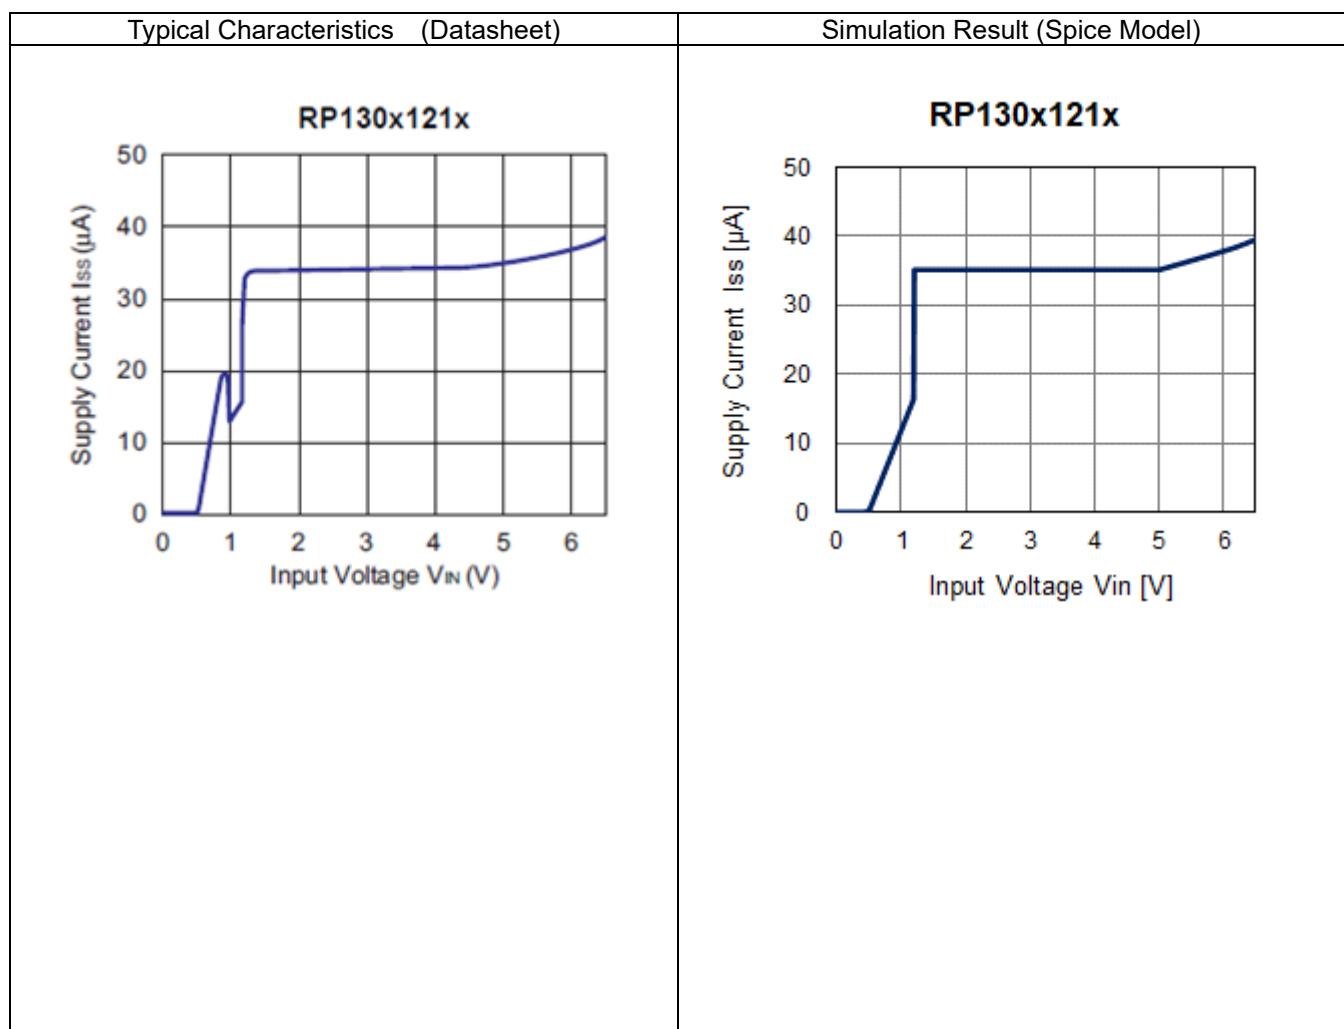


## Characteristic Data

## Dropout Voltage vs. Output Current

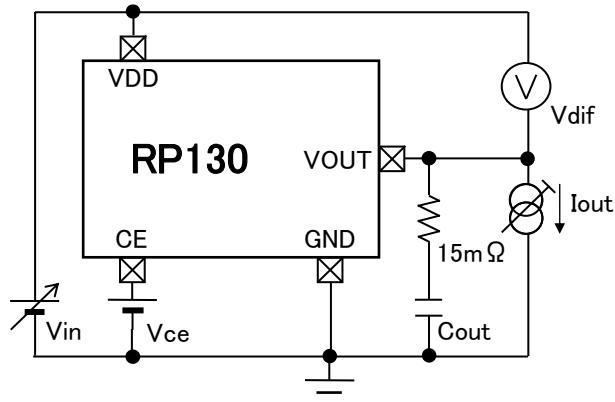Condition

$V_{in} = 0$  to  $6.5$  [V] DC Sweep  
 for each  $I_{out}$  (0 to 150[mA])  
 $V_{ce} = 1.0$  [V]  
 $C_{out} = 0.47$  [ $\mu F$ ]

## · Simulation Result

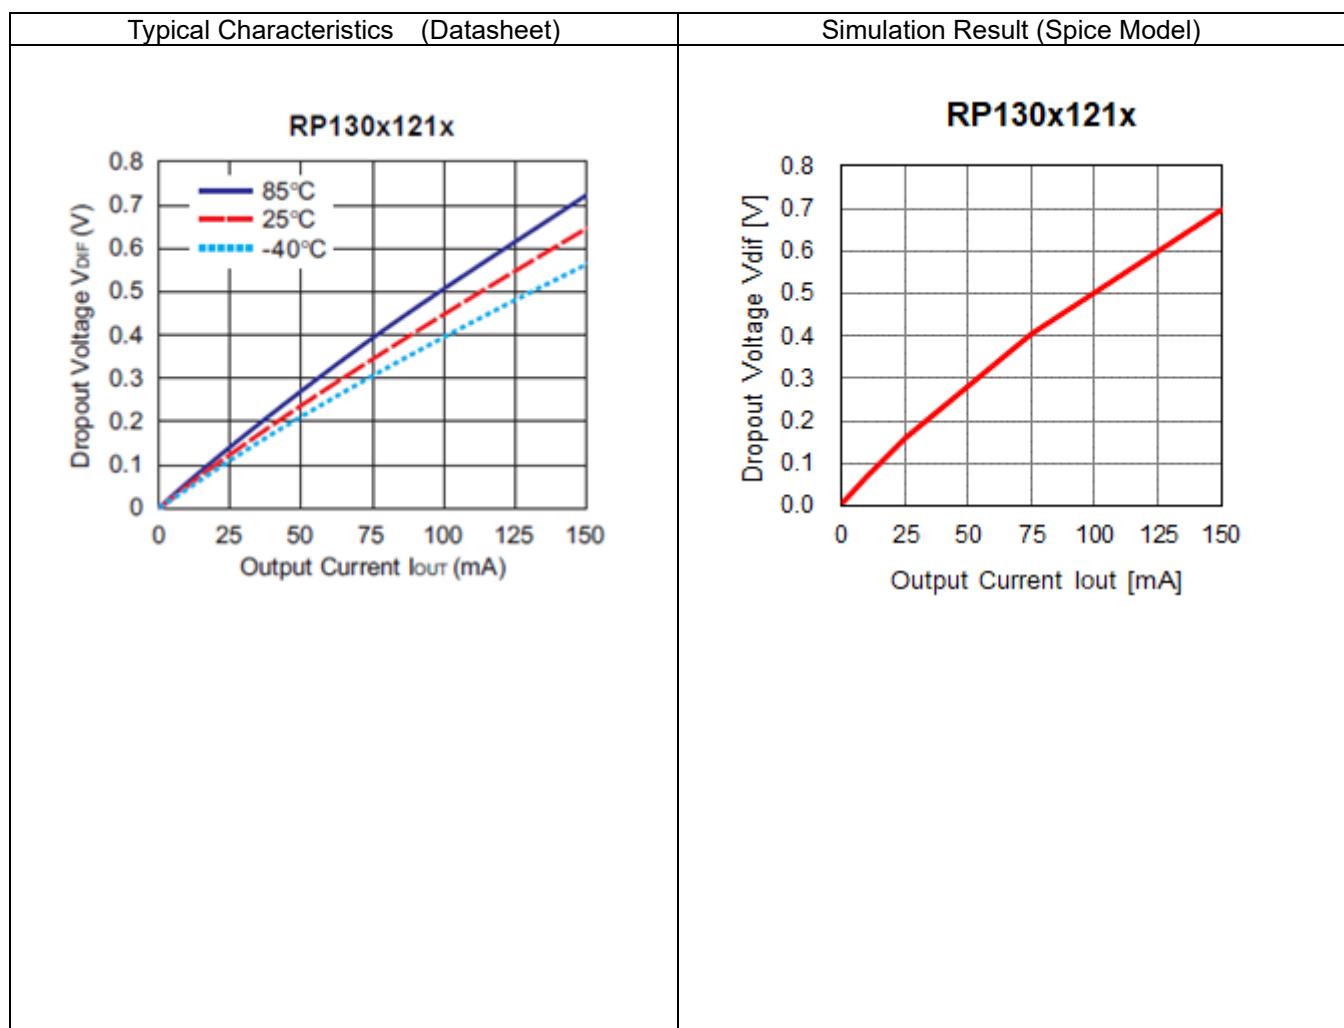


## RP130x121x\_C,YC

No. SPM-RP130x121x\_C,YC-210902

### Characteristic Data

#### Ripple Rejection vs. Input Bias Voltage

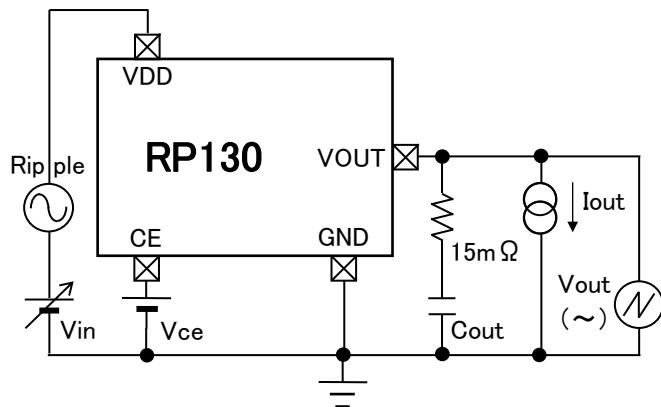


#### Condition

Vin = 1.2 to 6.5 [V] DC Sweep  
 Vce = 1.0 [V]  
 Cout = 0.47 [ $\mu$ F]  
 Iout = 1, 30 [mA]  
 Ripple Freq.= 0.1, 1, 10, 100 [kHz]  
 AC(small signal) sim. was executed.


**Notice:** The graph of Typical Characteristics (datasheet) is for the different version from this model.

#### Simulation Result

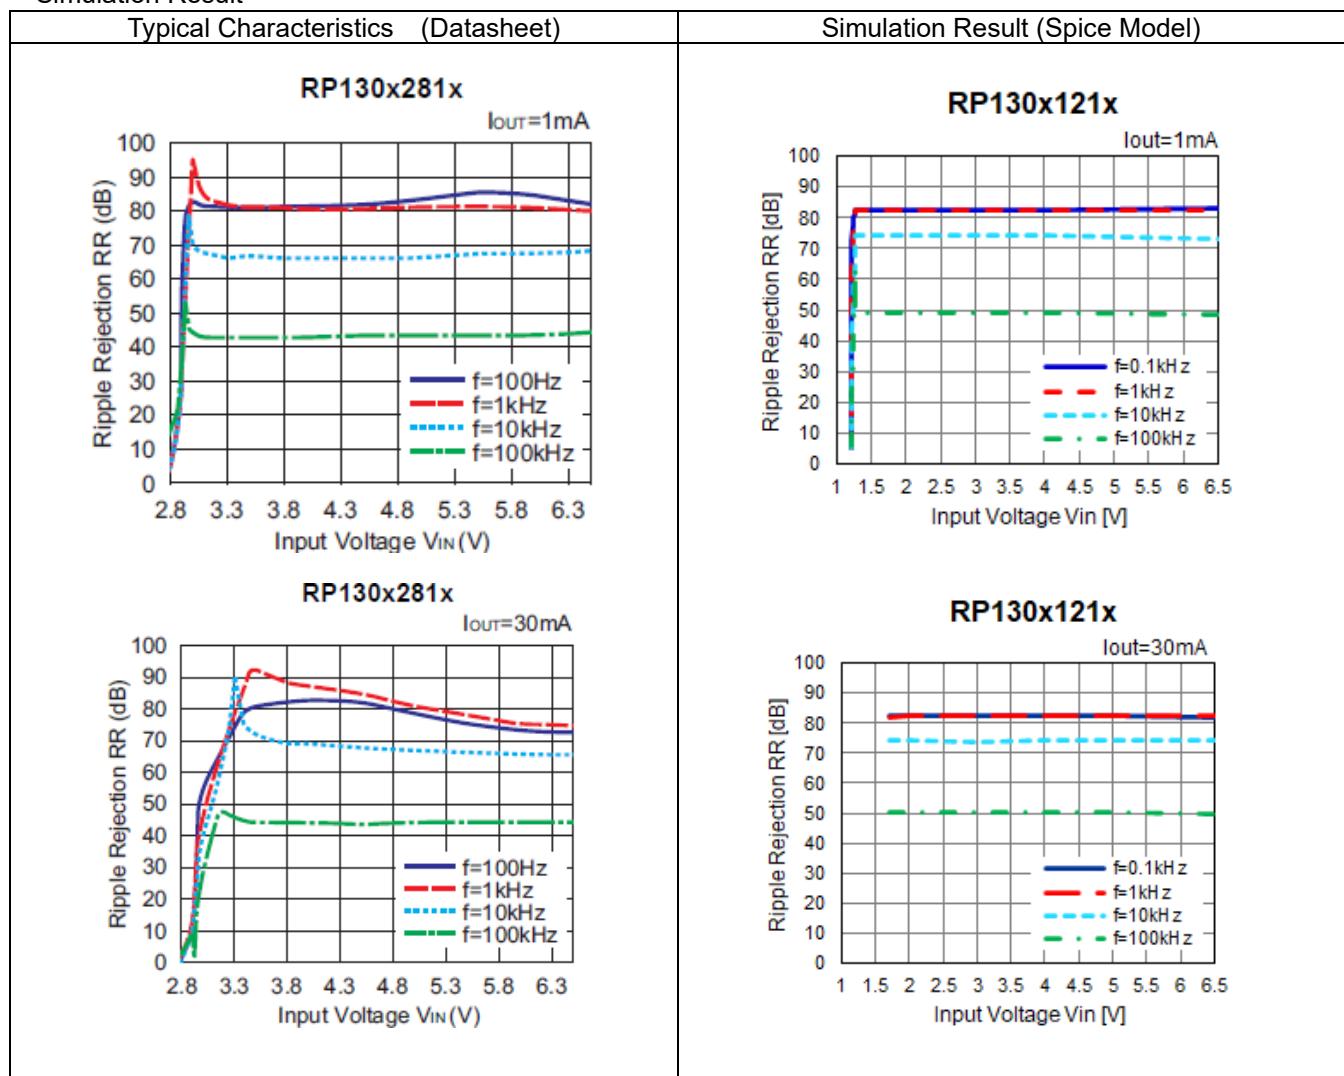


## Characteristic Data

## Ripple Rejection vs. Frequency

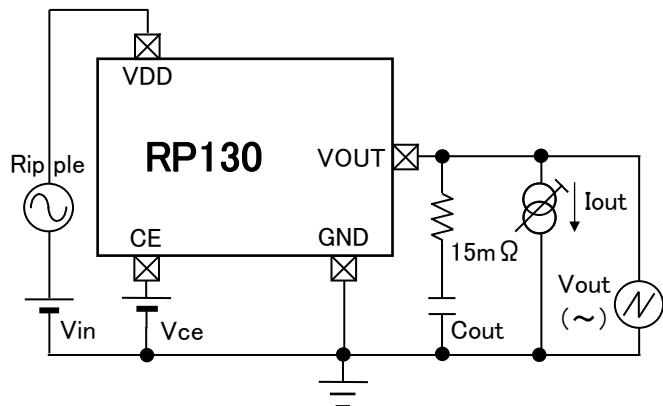Condition

$V_{in} = 2.2 \text{ [V]}$   
 $V_{ce} = 1.0 \text{ [V]}$   
 $C_{out} = 0.47 \text{ [\mu F]}$   
 $I_{out} = 1, 30, 150 \text{ [mA]}$   
 Ripple Freq.= 0.1 to 1000 [kHz]  
 AC(small signal) sim. was executed.

## • Simulation Result

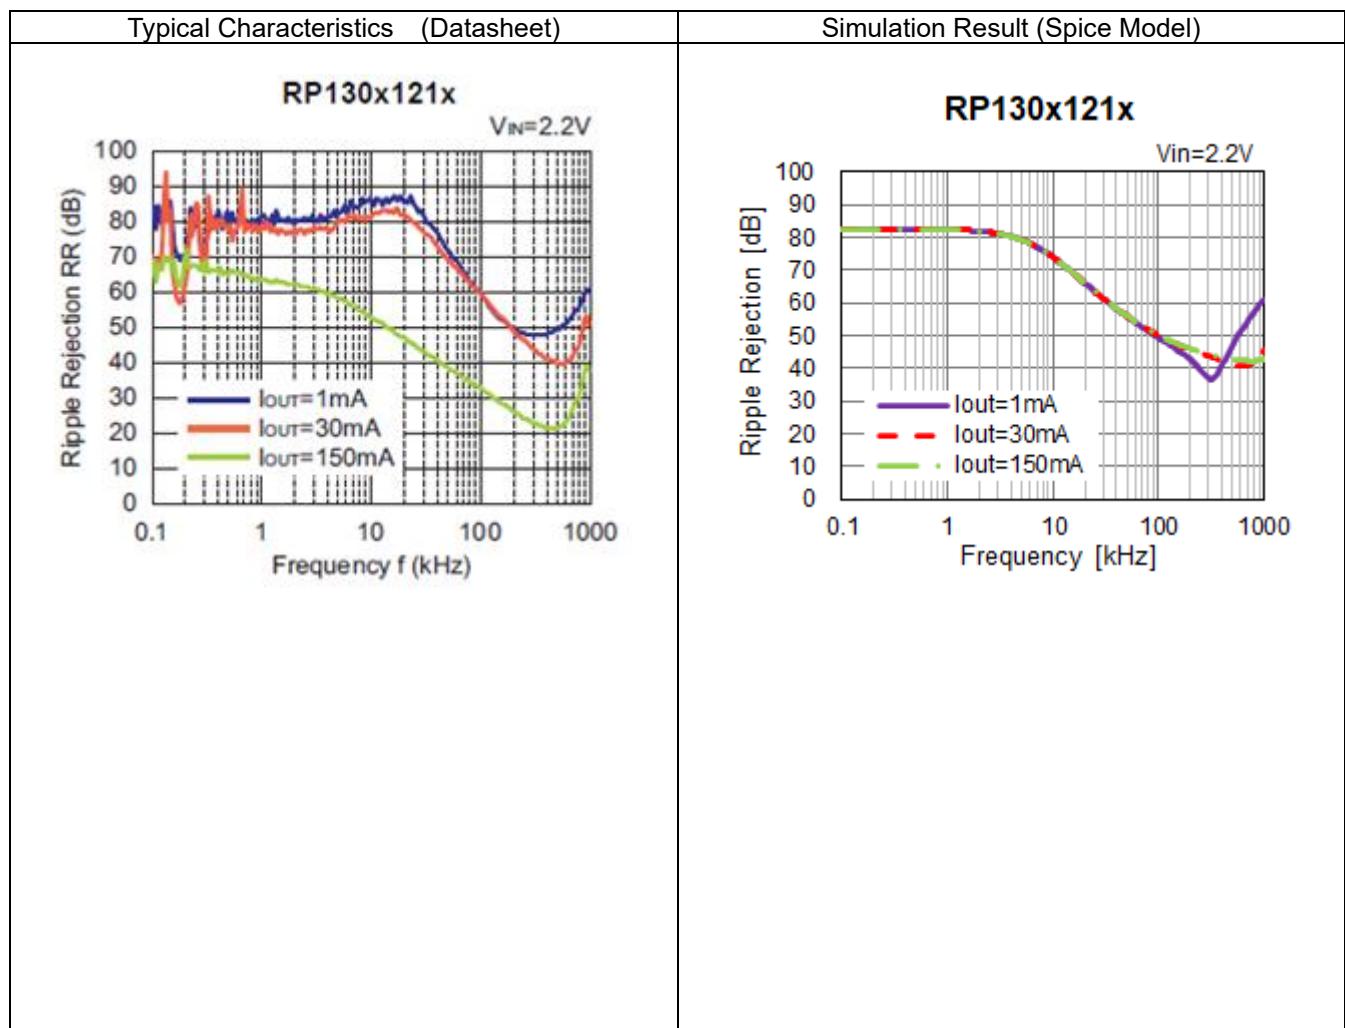

---


## RP130x121x\_C,YC

---

No. SPM-RP130x121x\_C,YC-210902

### Characteristic Data

#### Input Transient Response

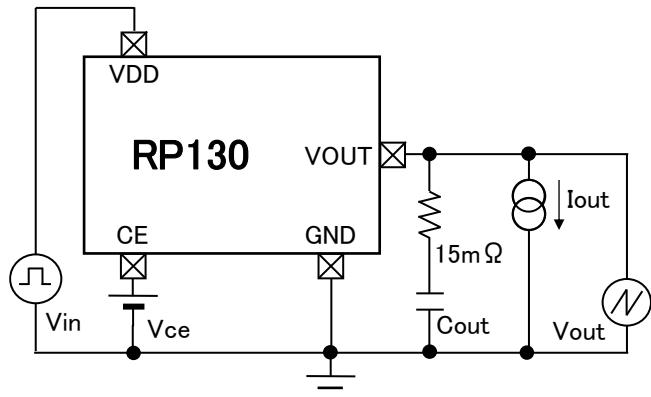

#### Condition

$$V_{in} = 2.2 \rightarrow 3.2 \rightarrow 2.2 [V]$$


$$t_r = t_f = 5 [\mu s]$$

$$V_{ce} = 1.0 [V]$$

$$C_{out} = 0.47 [\mu F]$$


$$I_{out} = 30 [mA]$$

- Simulation Result

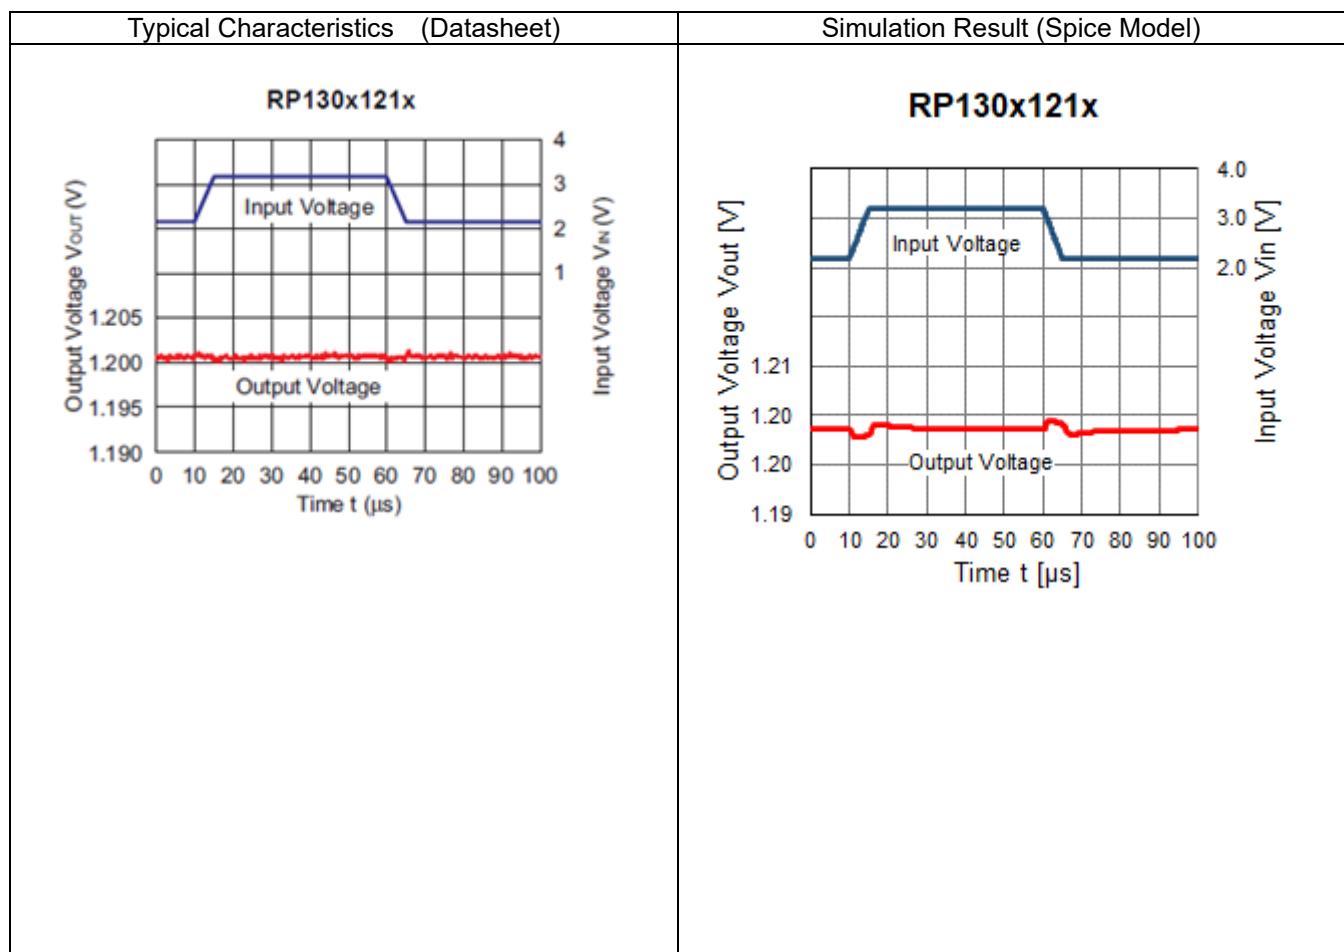


## Characteristic Data

## Load Transient Response

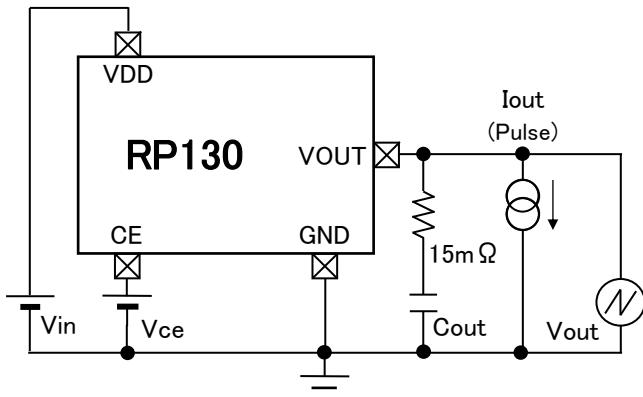Condition

$V_{in} = 2.2 \text{ [V]}$   
 $V_{ce} = 1.0 \text{ [V]}$   
 $C_{out} = 0.47 \text{ [\mu F]}$   
 $I_{out} = 50 \rightarrow 100 \rightarrow 50 \text{ [mA]}$   
 $t_r = t_f = 0.5 \text{ [\mu s]}$

## • Simulation Result

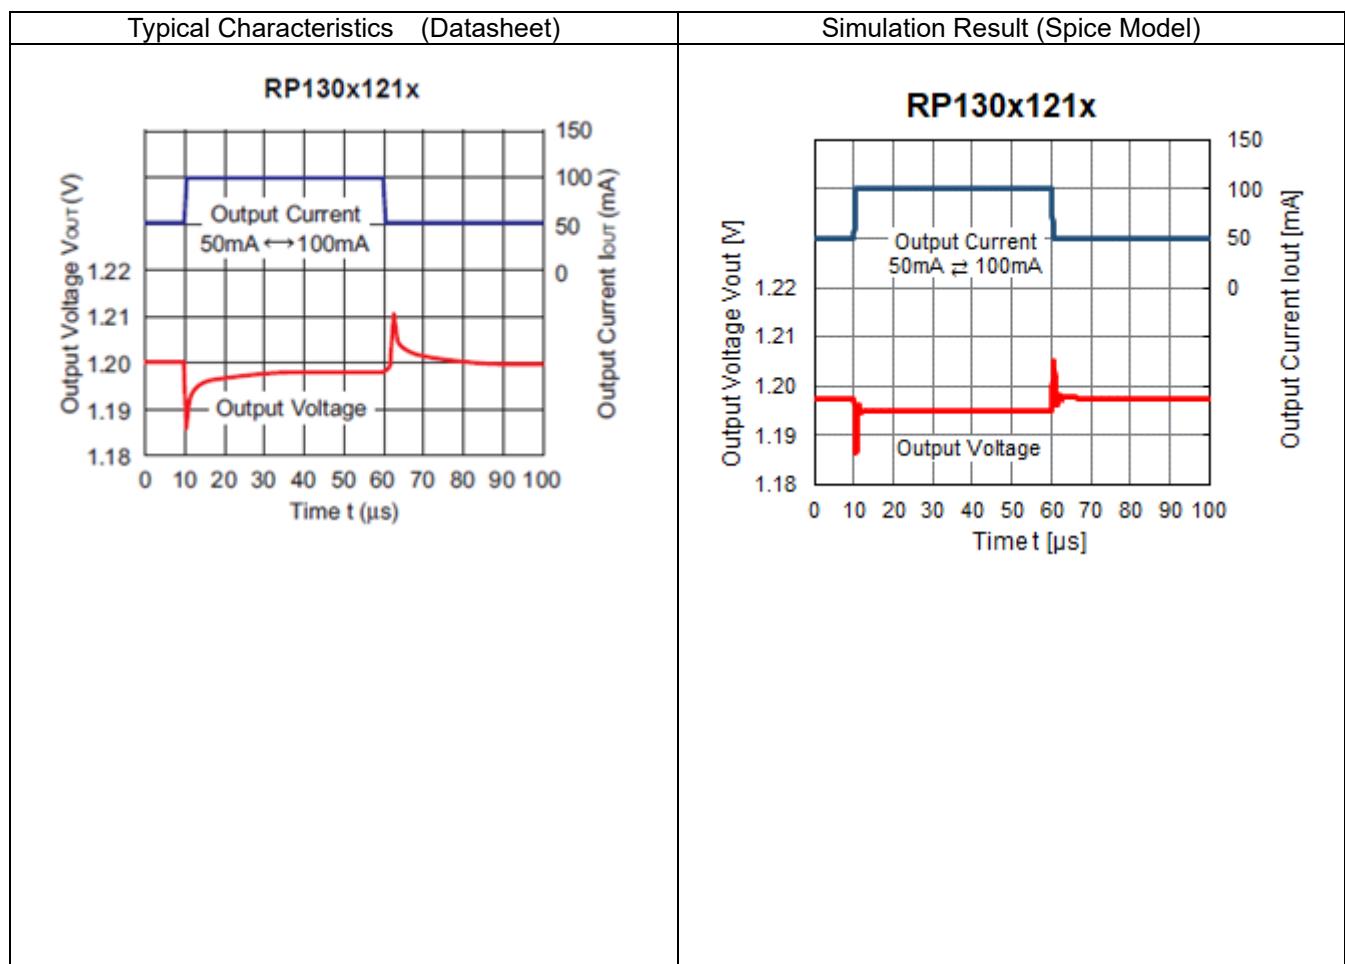


## RP130x121x\_C,YC

No. SPM-RP130x121x\_C,YC-210902

### Characteristic Data


#### Load Transient Response

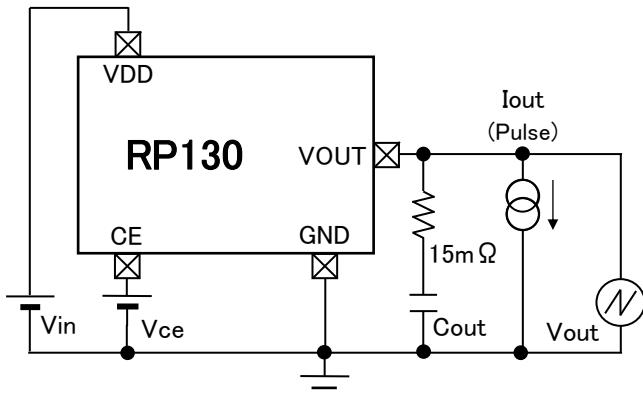

#### Condition


$V_{in} = 2.2 \text{ [V]}$   
 $V_{ce} = 1.0 \text{ [V]}$   
 $C_{out} = 0.47 \text{ [\mu F]}$   
 $I_{out} = 1 \rightarrow 150 \rightarrow 1 \text{ [mA]}$   
 $t_r = t_f = 0.5 \text{ [\mu s]}$

#### Simulation Result

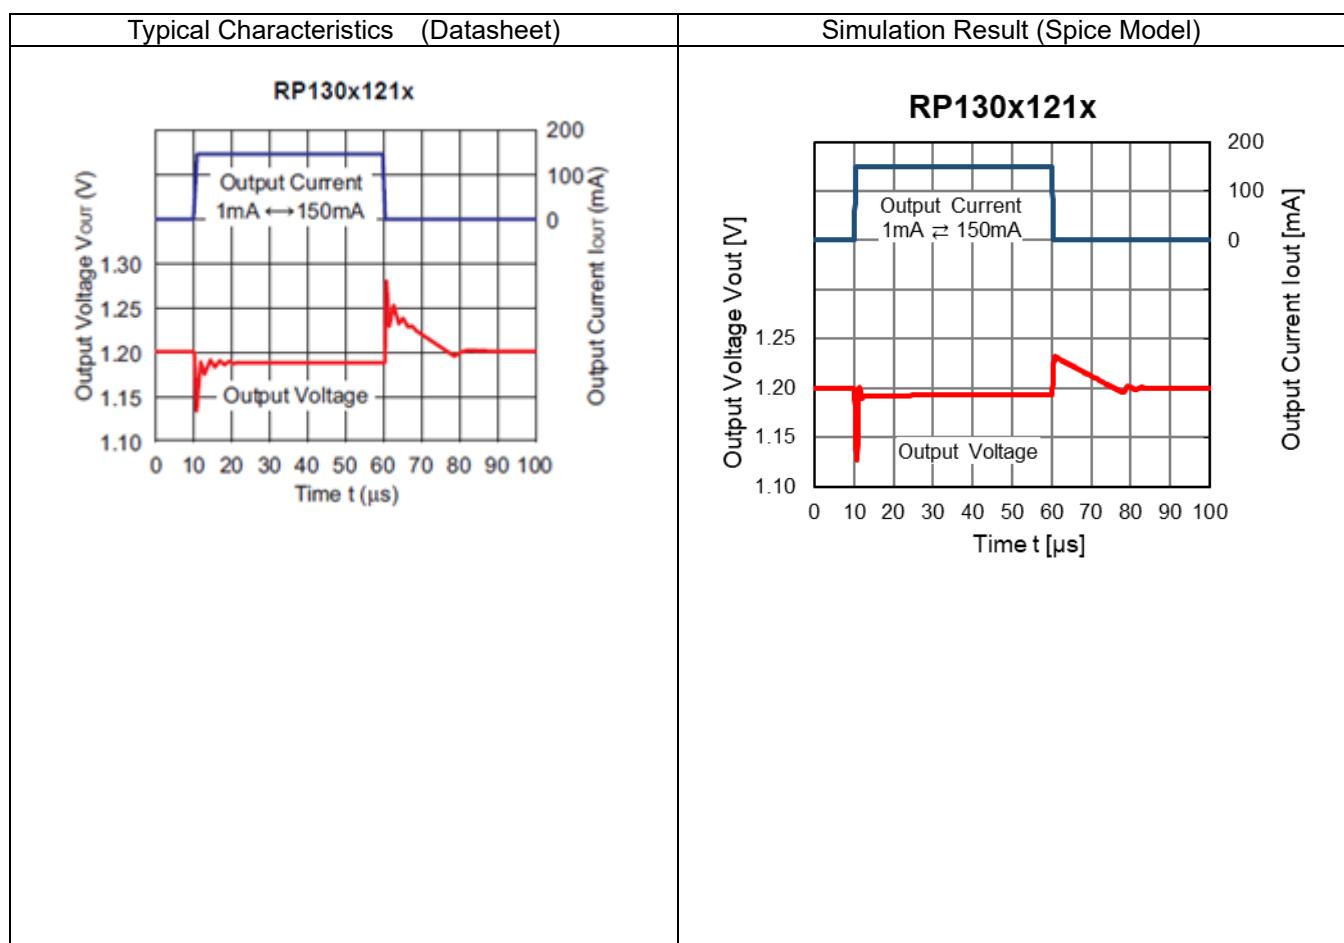


## Characteristic Data

## Load Transient Response

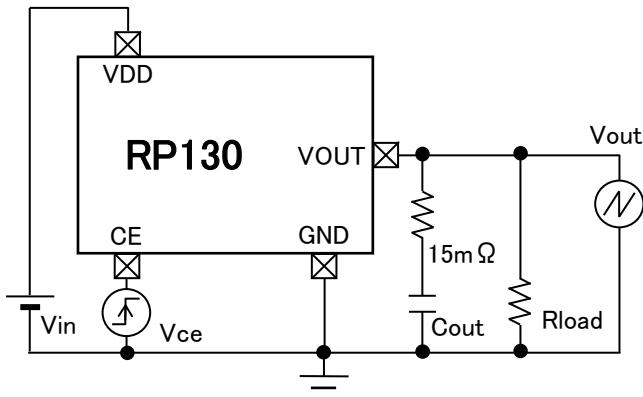Condition

$V_{in} = 2.2 \text{ [V]}$   
 $V_{ce} = 0 \rightarrow 2.2 \text{ [V]}$   
 $C_{out} = 0.47 \text{ [\mu F]}$   
 $R_{load} = 1200 \text{ [\Omega]}$   
(  $I_{out} = 1 \text{ [mA]}$  )

## • Simulation Result

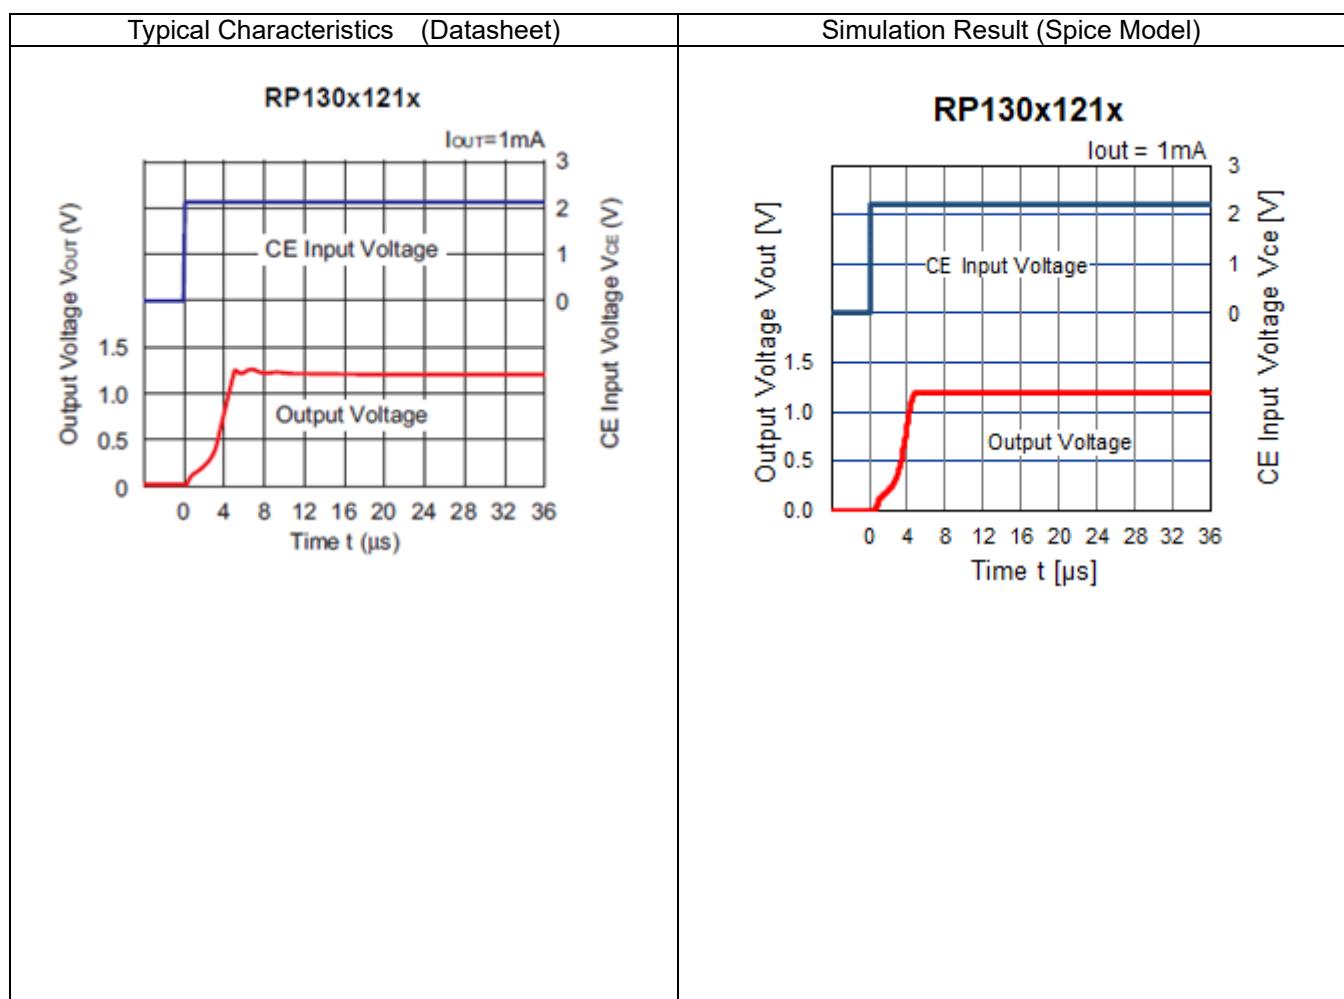


## RP130x121x\_C,YC

No. SPM-RP130x121x\_C,YC-210902

### Characteristic Data


Turn On Speed with CE pin

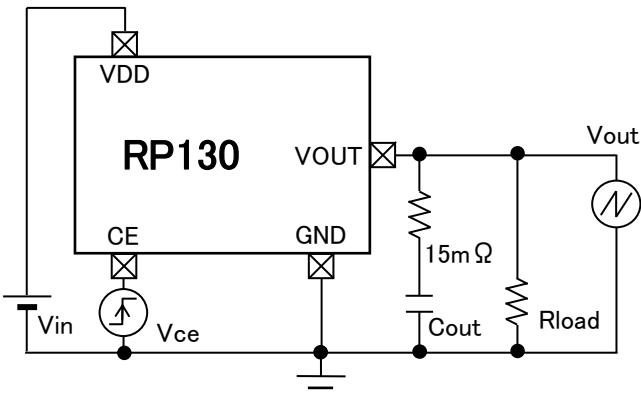

#### Condition


$V_{in} = 2.2 [V]$   
 $V_{ce} = 0 \rightarrow 2.2 [V]$   
 $C_{out} = 0.47 [\mu F]$   
 $R_{load} = 40 [\Omega]$   
(  $I_{out} = 30 [mA]$  )

#### • Simulation Result

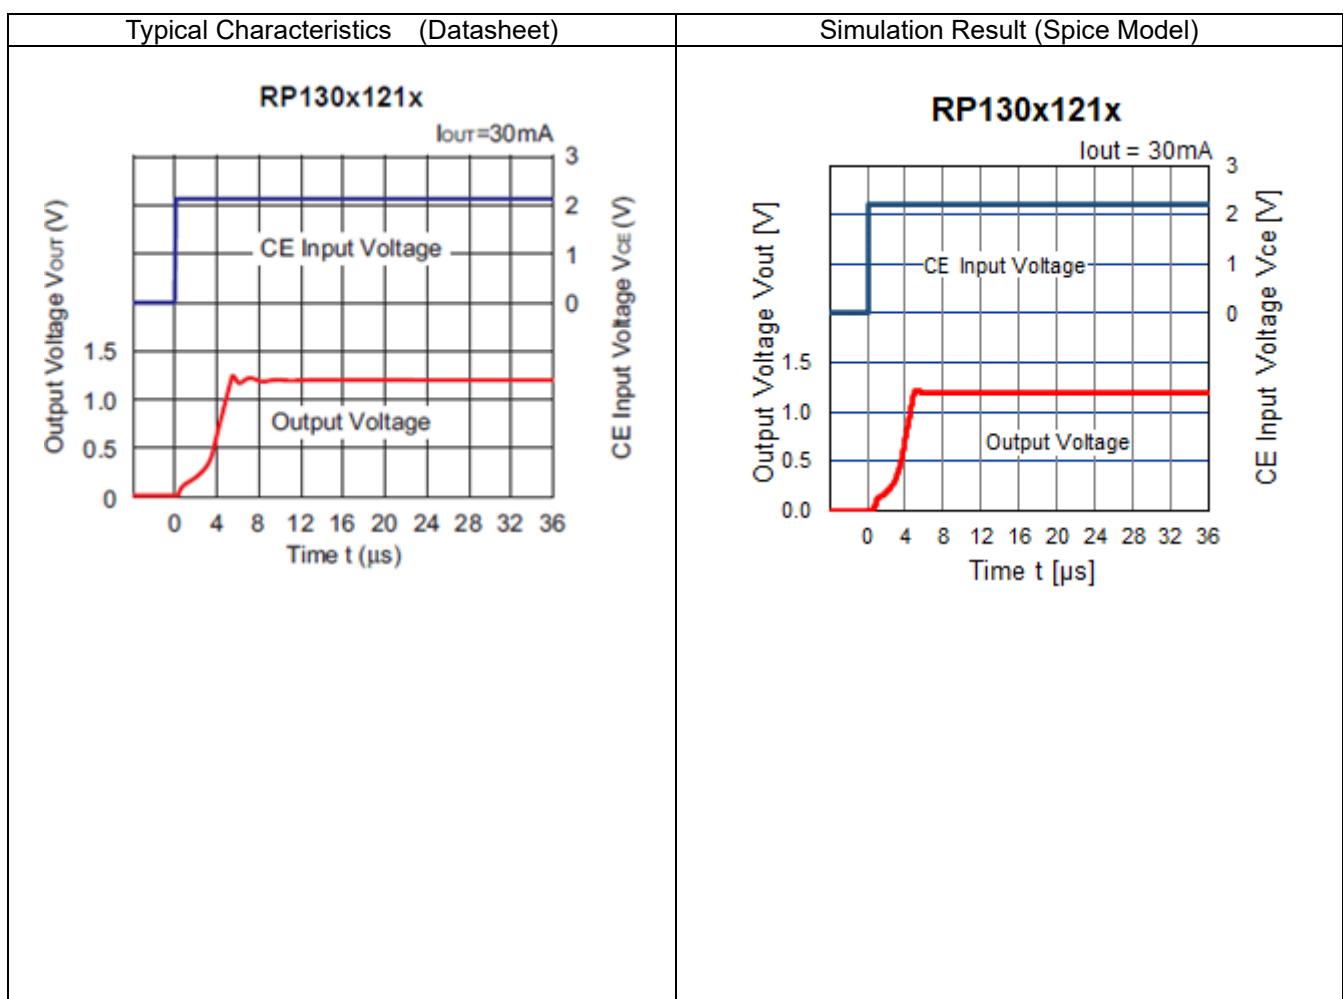


## Characteristic Data

Turn On Speed with CE pin

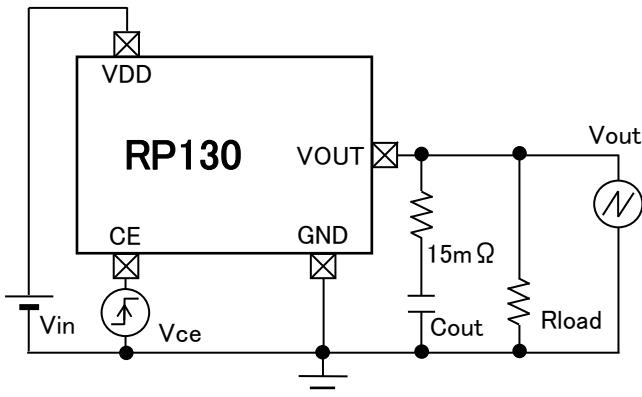Condition

$V_{in} = 2.2 \text{ [V]}$   
 $V_{ce} = 0 \rightarrow 2.2 \text{ [V]}$   
 $C_{out} = 0.47 \text{ [\mu F]}$   
 $R_{load} = 8 \text{ [\Omega]}$   
 $(I_{out} = 150 \text{ [mA]})$

## ▪ Simulation Result

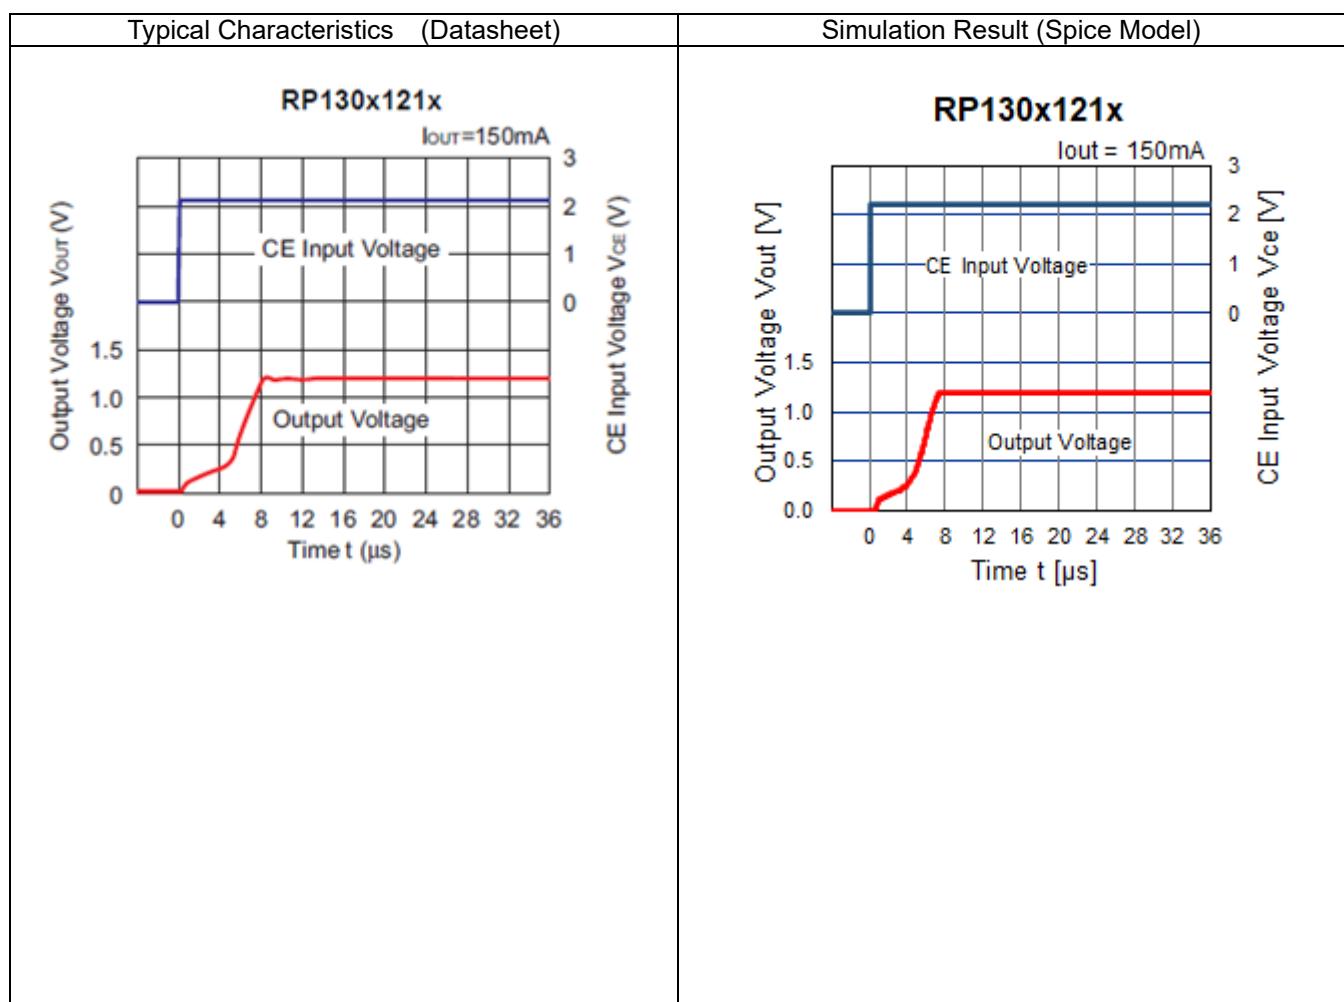


## RP130x121x\_C,YC

No. SPM-RP130x121x\_C,YC-210902

### Characteristic Data


#### Turn Off Speed with CE pin

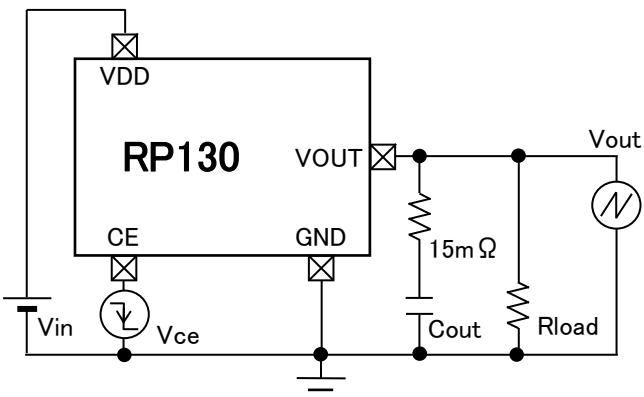

#### Condition


$V_{in} = 2.2 \text{ [V]}$   
 $V_{ce} = 2.2 \rightarrow 0 \text{ [V]}$   
 $C_{out} = 0.47 \text{ [\mu F]}$   
 $R_{load} = 1200 \text{ [\Omega]}$   
(  $I_{out} = 1 \text{ [mA]}$  )

#### • Simulation Result

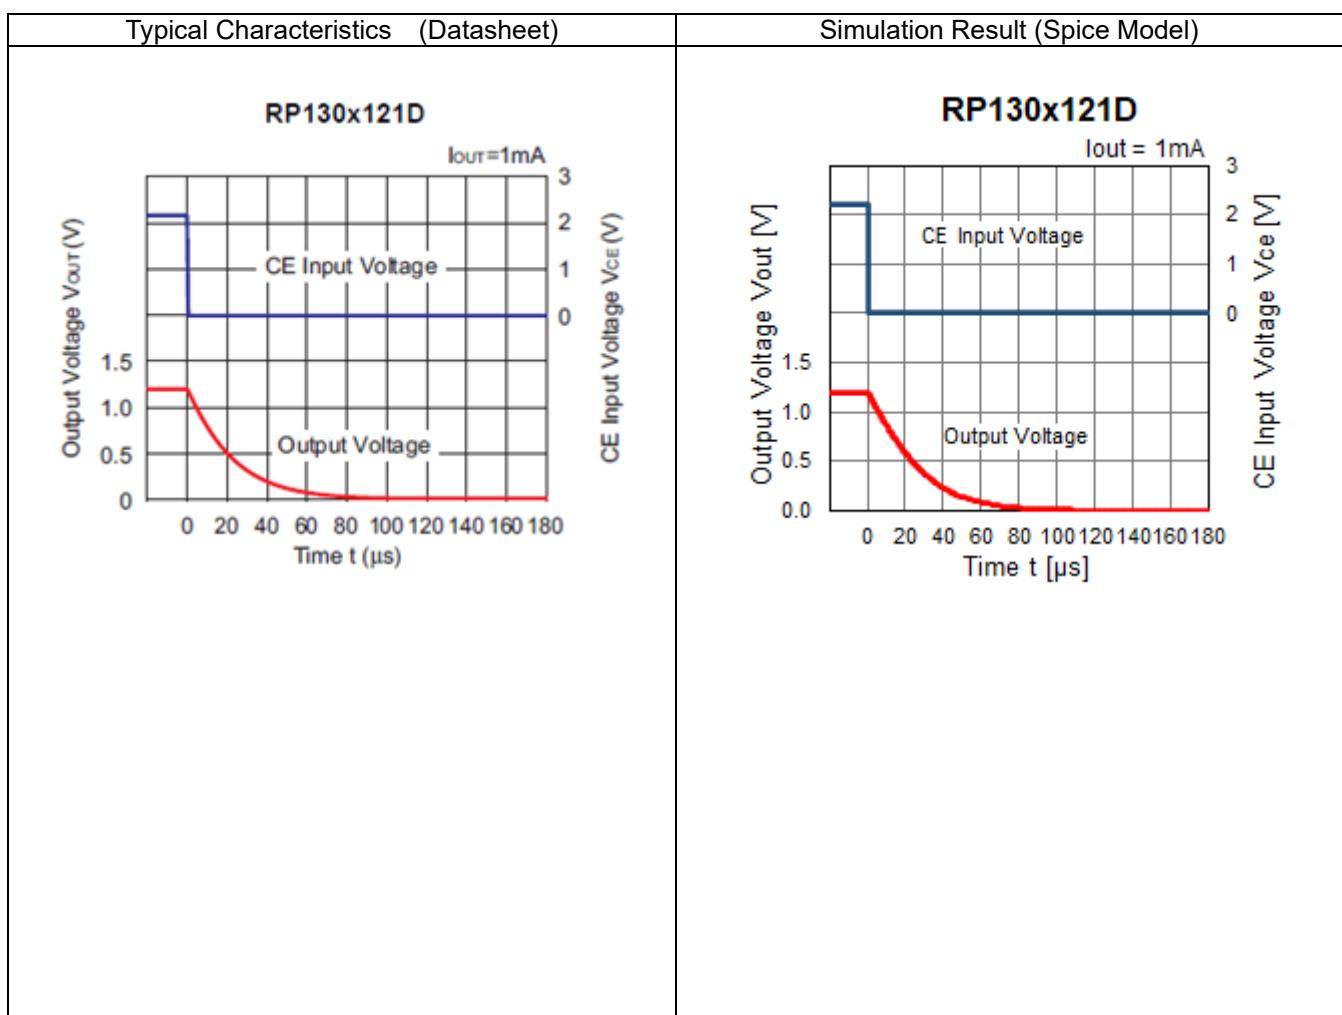


## Characteristic Data

Turn Off Speed with CE pin

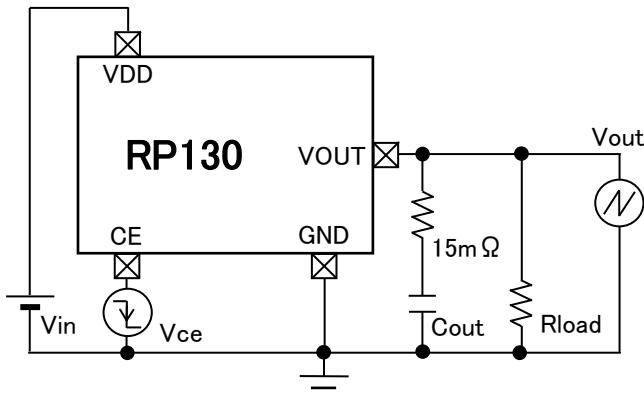Condition

$V_{in} = 2.2 \text{ [V]}$   
 $V_{ce} = 2.2 \rightarrow 0 \text{ [V]}$   
 $C_{out} = 0.47 \text{ [\mu F]}$   
 $R_{load} = 40 \text{ [\Omega]}$   
(  $I_{out} = 30 \text{ [mA]}$  )

## ▪ Simulation Result

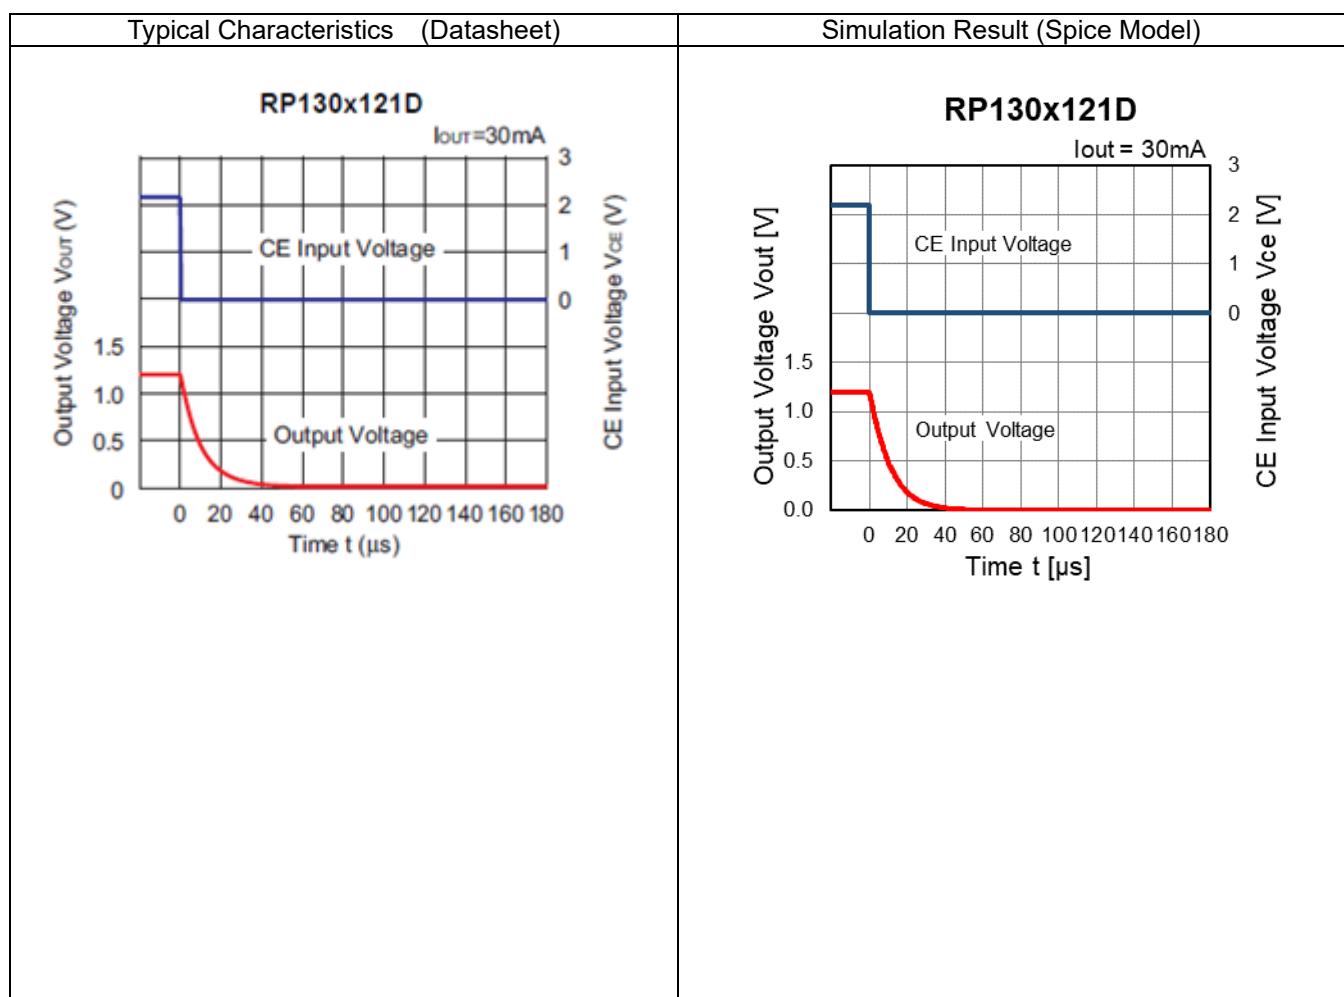


## RP130x121x\_C,YC

No. SPM-RP130x121x\_C,YC-210902

### Characteristic Data

#### Turn Off Speed with CE pin

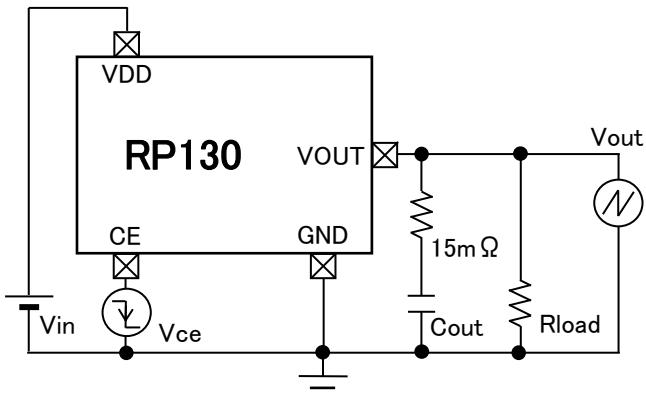

#### Condition

$V_{in} = 2.2 \text{ [V]}$   
 $V_{ce} = 2.2 \rightarrow 0 \text{ [V]}$   
 $C_{out} = 0.47 \text{ [\mu F]}$   
 $R_{load} = 8 \text{ [\Omega]}$   
(  $I_{out} = 150 \text{ [mA]}$  )

#### Simulation Result

